

Made by

**NEWTEC BAG
PALLETIZING**



PALLETIZER SERIES 1800

The palletizer series 1800 is suitable for medium throughputs from 1,500 to 2,000 bags/hour. The modular design of this equipment guarantees an optimal palletizing quality, taking into account the specifics of the different markets, such as the food industry, the chemical industry and the building materials industry.

Our advantages:

■ Features


- bag palletizer with layer deposit for medium working rate from 1,500 to 2,000 bags/hr
- turning clamp for 90° or 180° bag turning

■ Maintenance

- easy maintenance
- modem or VPN connection
- low maintenance cost

■ Operational

- HMI allows all manual operations and modification of all parameters of the machine
- provided with a second row pusher

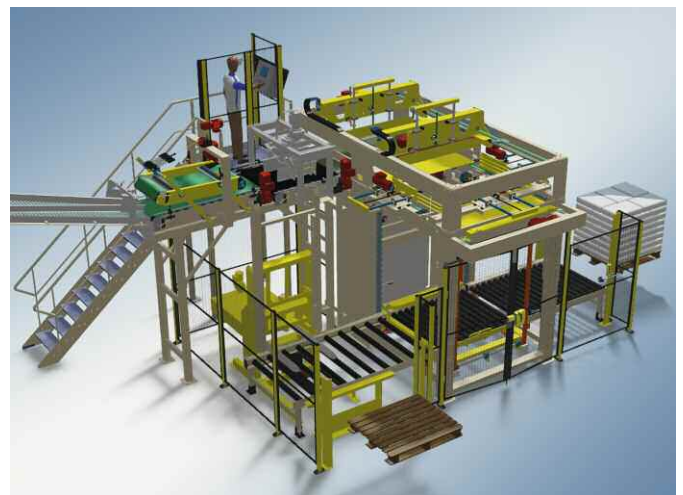

TECHNICAL DATA

PRODUCTS

Pet Food
Mortar
Plastic granulates

CAPACITY

1,800 to 2,000 bags/hr

BAG TYPE

Paper valve bags or open bags
PE valve bags or open bags
PP valve bags ou open bags
FFS bags

BAG WEIGHT


5 to 50 kg

Made by

**NEWTEC BAG
PALLETIZING**



PALLETIZER SERIES 1800

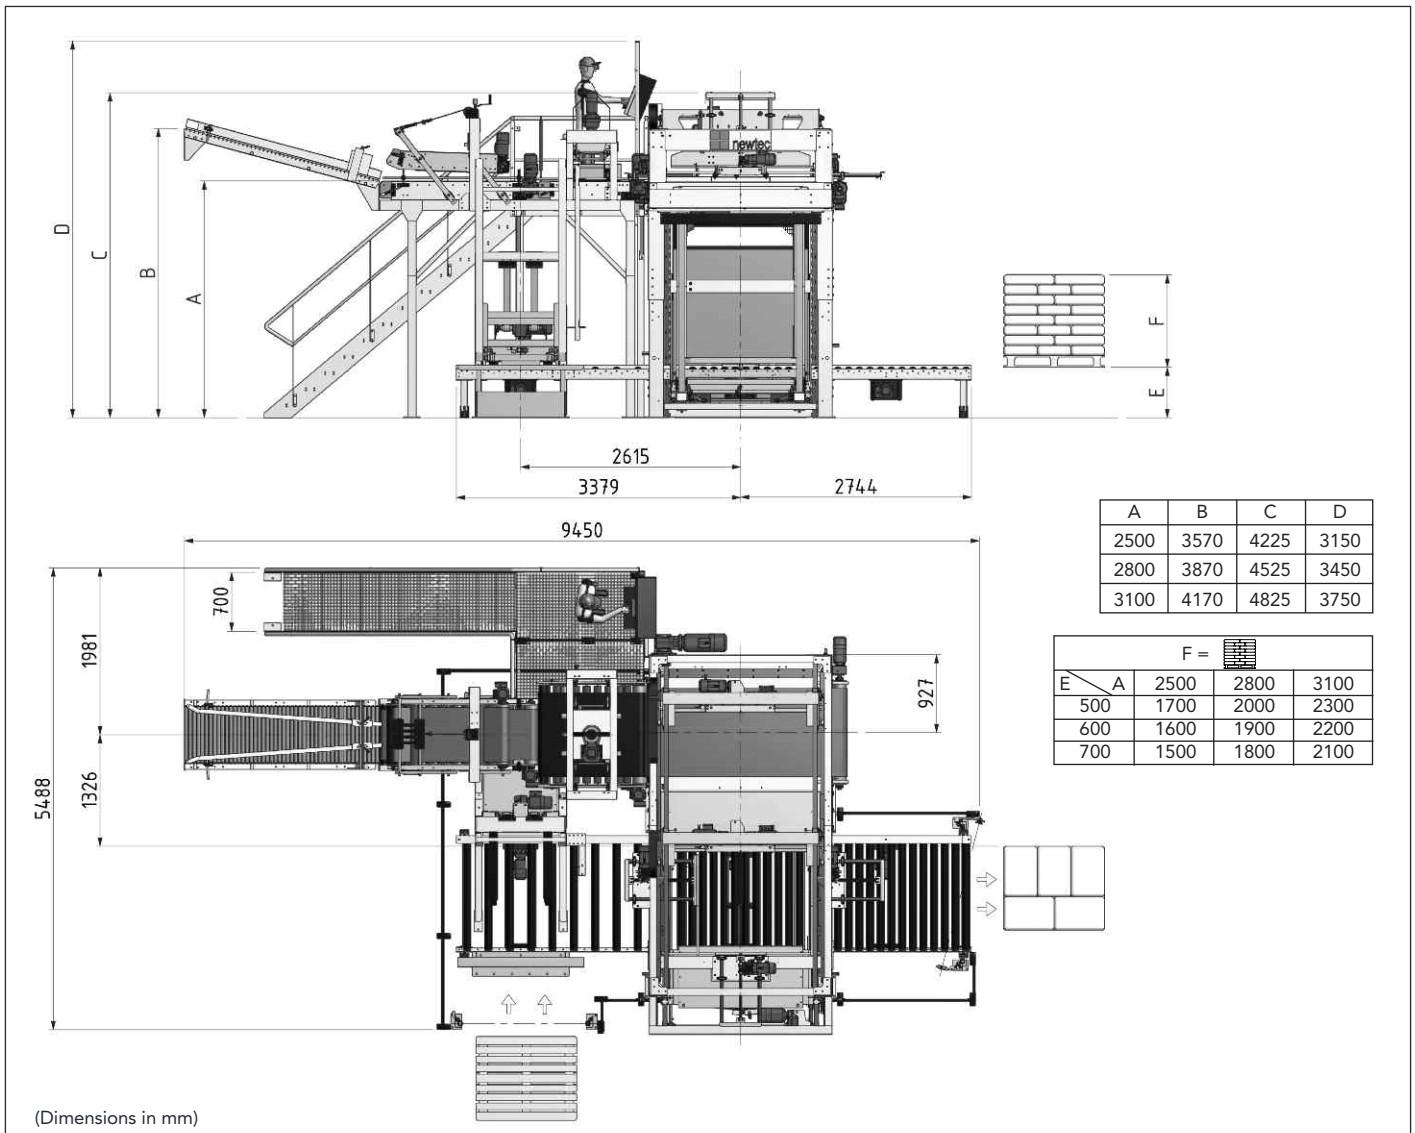

TECHNICAL DATA

ELECTRICITY AND PNEUMATIC

OPERATING VOLTAGE 380 V to 460 V/3 Ph
FREQUENCY 50 and 60 Hz
CONTROL VOLTAGE 24 V DC
INSTALLED POWER 35 kW
PROTECTION IP 54

INSULATION CLASS F
PLC SIEMENS AND ROCKWELL
AIR CONSUMPTION 9 Nm³/h
INSTRUMENT AIR PRESSURE 5 to 6 bars