

Made by

**NEWTEC BAG
PALLETIZING**



PALLETIZER SERIES 2500 P

The palletizer series 2500 P covers high production rates from 2,000 to 2,500 bags/hour. This series of automatic bag palletizers is appropriate for the food industry, the chemical industry as well as the building materials industry.

Our advantages :

■ Features


- bag palletizer with layer deposit for high working rate from 2,000 to 2,500 bags/hr
- bag orientation with turning clamp
- pre-grouping belt for step-by-step preparation of the bags in row

■ Maintenance

- easy maintenance
- modem or VPN connection
- low maintenance cost

■ Operational

- HMI allows manual operations and modification of all parameters of the machine
- this series can be completed with additional options (pallet press, deposit of PE film, deposit of bottom sheets onto empty pallets or interlayer sheets)

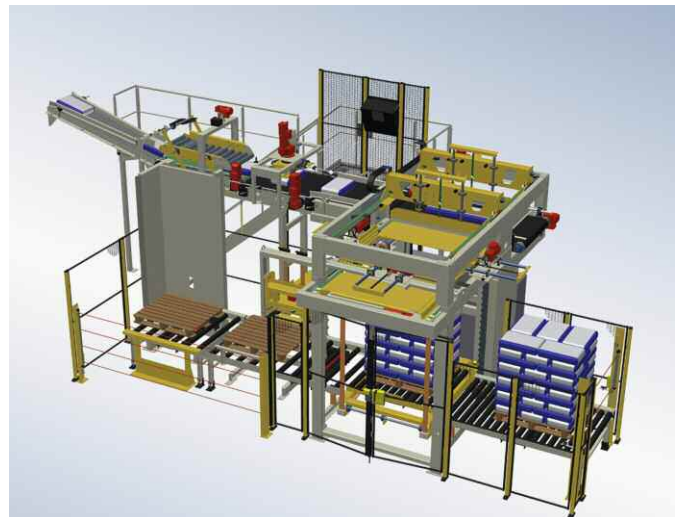

TECHNICAL DATA

PRODUCTS

Pet Food
Flour
Mortar

CAPACITY

2,000 to 2,500 bags/hr

BAG TYPE

Paper valve bags or open bags
PE valve bags or open bags
PP valve bags ou open bags
FFS bags

BAG WEIGHT


5 to 50 kg

Made by

**NEWTEC BAG
PALLETIZING**




PALLETIZER SERIES 2500 P

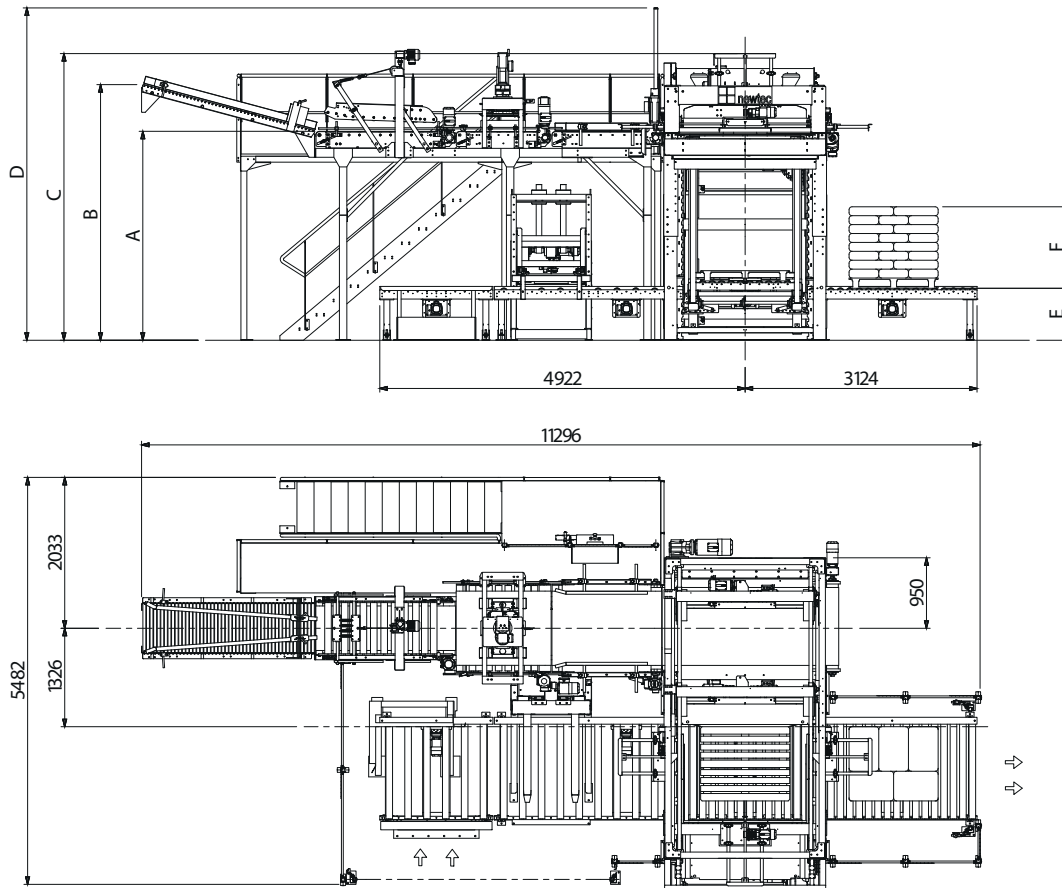

(Dimensions in mm)

A	B	C	D
2500	3220	3570	4180
2800	3520	3870	4480
3100	3820	4170	4780

		F = 		
E \ A	A	2500	2800	3100
500		1700	2000	2300
600		1600	1900	2200
700		1500	1800	2100

TECHNICAL DATA

ELECTRICITY AND PNEUMATIC

OPERATING VOLTAGE 380 V to 460 V/3 Ph
FREQUENCY 50 and 60 Hz
CONTROL VOLTAGE 24 V DC
INSTALLED POWER 35 kW
PROTECTION IP 55

INSULATION CLASS F
PLC SIEMENS and ROCKWELL
AIR CONSUMPTION 9 Nm³/h
INSTRUMENT AIR PRESSURE 5 to 6 bars