

PALLETIZER SERIES G 300

The palletizer series G 300 is designed for low capacity applications up to 300 bags/hour for bags from 5 to 50 kg. This series exists in a semi-automatic version, where empty pallets are supplied and full pallets are removed using a pallet truck, or in an automatic version with an empty pallet dispenser and removal conveyors.

Our advantages:

- Features
 - deposit in a frame
 - picking up of bags with a gripper enabling overlapping
 - capacity 300 bags/hr
 - slip sheet dispenser interlayer in option
- Maintenance
 - easy maintenance in the floor area
 - standardisation of components
 - VPN connection
 - low maintenance cost
- Operational
 - HMI allows manual operation and the modification of all parameters of the machine
 - touch screen for packing pattern program



TECHNICAL DATA

Cereal Flour

PRODUCTS

Milk powder Granules CAPACITY

max. 300 bags/hr

BAG TYPE


Paper valve bags or open bags
PE valve bags or open bags
PP valve bags ou open bags
FFS bags

BAG WEIGHT

5 to 50 kg



PALLETIZER SERIES G 300

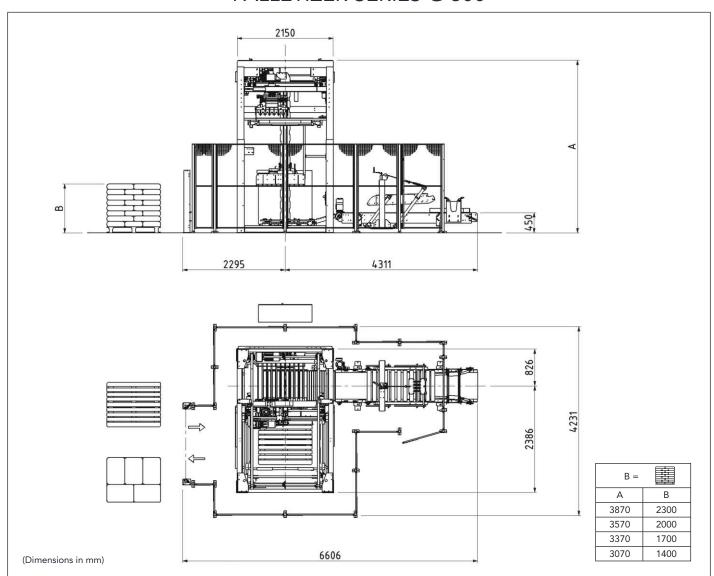

ľЦ	NII	$C \cdot \Lambda$		Λ	Λ
	IVI	CA	Lレ	\mathcal{H}	\mathbf{H}

ELECTRICITY AND PNEUMATIC

OPERATING VOLTAGE from 380 V to 460 V/3 Ph

PLC

FREQUENCY CONTROL VOLTAGE 50 and 60 Hz

Proface

INSTALLED POWER

24 V DC

AIR CONSUMPTION

INSULATION CLASS

4 Nm3/h

between 6 and 9 kW (according the version)

INSTRUMENT AIR PRESSURE

IP 54 **PROTECTION**

5 to 6 bars